

Short Course on Experimental Dynamic Substructuring

Module #8: Decoupling Techniques



THE UNIVERSITY
of
WISCONSIN
MADISON

Matthew S. Allen

Associate Professor, University of Wisconsin-Madison

Daniel Rixen

Chair, Institute of Applied Mechanics, Technische Universität München

Randall L. Mayes

Distinguished Member of Technical Staff, Sandia National Labs.


Short Course Notes For:

February 1, 2014, IMAC, Orlando, Florida


What is decoupling ?

- The basic idea:

Substructure coupling:

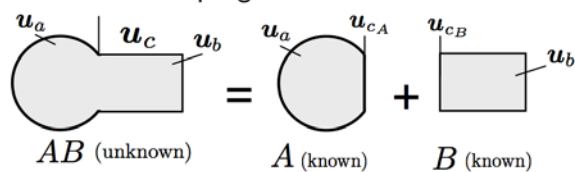


Substructure decoupling:

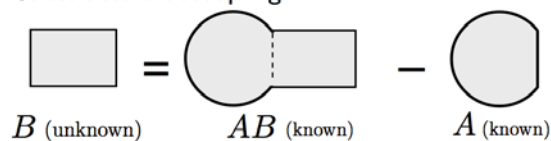




Why decoupling ?

- Find the FRFs of components that can not well measured when standalone (e.g. removing dynamics of test-frame)
- Obtain the FRFs of a component including its interface dynamics (damping and stiffness). Example
 - steering gear [10],
 - blades attached to hub (Ampair wind Turbine benchmark [11])

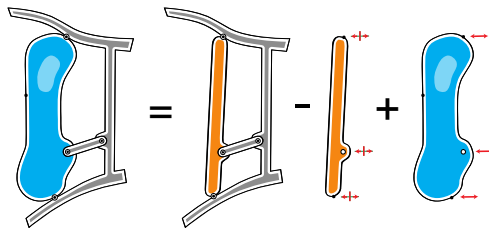

Why decoupling ?

- continued ...
 - blades attached to hub (Ampair wind Turbine benchmark [11])

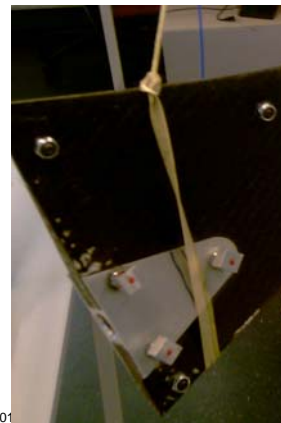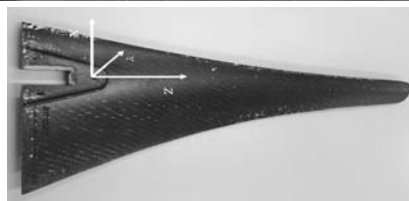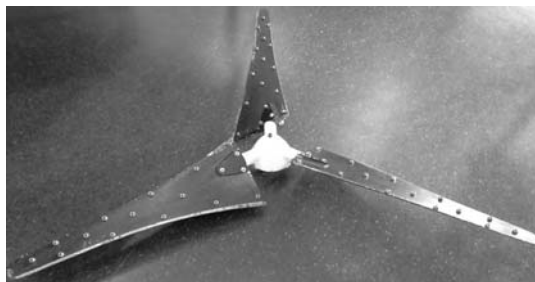


Why decoupling ?

- Let the component vibrate during tests in “modes” closer to the behavior of the component in the full assembly (the “inversion” in the FRF has “less work to do”): idea of transmission simulator [7]

$$A+B = (A+C)+(B+C) - 2 C$$

see MOD08

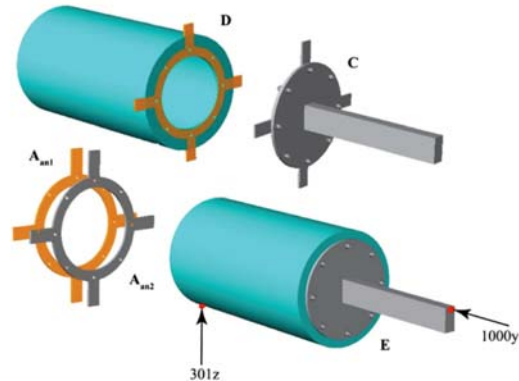

Short Course on Experimental Dynamic Substructuring, © 2014

5

Why decoupling ?

But if coupling of substructures with FBS is tricky, isn't it even more tricky to apply decoupling ?

- ... since in decoupling we have redundant information one can mitigate measurement errors.
- The basic theory is very similar to the FBS for coupling (MOD02), but additional extensions can be devised

These notes are mainly based on [1].

Note:

A similar but different approach is called “inverse Substructuring” [2]. Whereas here we assume one of the substructure known, Inverse Substructuring aims at deriving the FRFs of both components (none of them being known at forehand). Requires measuring the response at both sides of a flexible interface between components.

Short Course on Experimental Dynamic Substructuring, © 2014

6

Outline

- **Recap of MOD02:**
Frequency Based Substructuring (FBS) 3-field form
- **Frequency Based Substructuring: Basics**
- **Frequency Based Substructuring: A big Family**
 - Method 1 – Standard Decoupling
 - Method 2 – Extended Interface Decoupling
 - Method 4 – Non-Collocated Overdetermined
 - Method 5 – Weak, Interface Filtering
 - Method 6 – Weak, A Filtering
 - Summary of Variants
- **Numerical Example / Experimental Example**



References and bibliography

Recap of MOD02: Frequency Based Substructuring (FBS)

Z : block-diagonal of substructure impedances (free interface)

B : Boolean matrix (-/+ 1) describing connectivity of dofs on interface

λ : interface forces

$$\begin{bmatrix} Z & B^T \\ B & 0 \end{bmatrix} \begin{bmatrix} u \\ \lambda \end{bmatrix} = \begin{bmatrix} f \\ 0 \end{bmatrix}$$



$$u = (Y - YB^T(BYB^T)^{-1}BY)f$$

incompatibility between substructures
when no connection

interface force λ needed for compatibility


response
to applied forces

response
to interface forces



Frequency Based Decoupling: Basic

If we want to “subtract” two substructures, we can just do

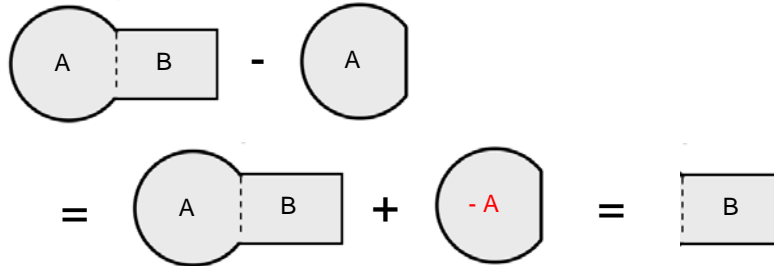

$$\begin{bmatrix} Z^{AB} & 0 & B^{AB^T} \\ 0 & -Z^A & B^{A^T} \\ B^{AB} & B^A & 0 \end{bmatrix} \begin{bmatrix} u^{AB} \\ u^A \\ \lambda \end{bmatrix} = \begin{bmatrix} f^{AB} \\ 0 \\ 0 \end{bmatrix}$$

Allows computing the dynamics of B when the FRFs of AB and A are known:
[Substructuring Decoupling](#)


Frequency Based Decoupling: Basics

Another interpretation:



$$\begin{bmatrix} Z^{AB} & 0 & B^{AB^T} \\ 0 & -Z^A & B^{A^T} \\ B^{AB} & B^A & 0 \end{bmatrix} \begin{bmatrix} u^{AB} \\ u^A \\ \lambda \end{bmatrix} = \begin{bmatrix} f^{AB} \\ 0 \\ 0 \end{bmatrix} \xrightarrow{\text{eq.} \times (-1)} \begin{bmatrix} Z^{AB} & 0 & B^{AB^T} \\ 0 & Z^A & -B^{A^T} \\ B^{AB} & B^A & 0 \end{bmatrix} \begin{bmatrix} u^{AB} \\ u^A \\ \lambda \end{bmatrix} = \begin{bmatrix} f^{AB} \\ 0 \\ 0 \end{bmatrix}$$

Response of the system AB as if A would be absent:

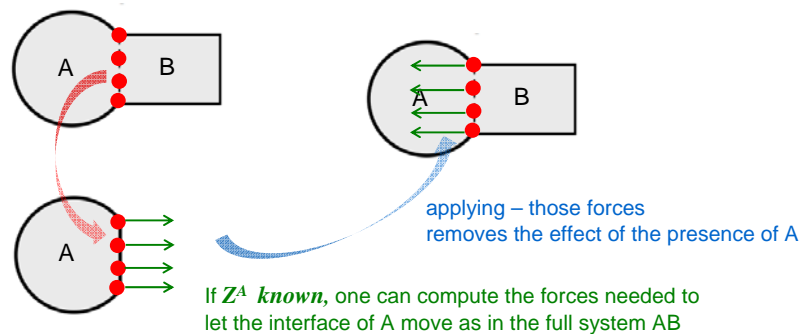

Frequency Based Decoupling: Basics

Working it out ...

$$\begin{bmatrix} \mathbf{Z}^{AB} & \mathbf{0} & \mathbf{B}^{AB^T} \\ \mathbf{0} & -\mathbf{Z}^A & \mathbf{B}^{A^T} \\ \mathbf{B}^{AB} & \mathbf{B}^A & \mathbf{0} \end{bmatrix} \begin{bmatrix} \mathbf{u}^{AB} \\ \mathbf{u}^A \\ \lambda \end{bmatrix} = \begin{bmatrix} \mathbf{f}^{AB} \\ \mathbf{0} \\ \mathbf{0} \end{bmatrix} \Rightarrow \begin{aligned} \mathbf{u}^{AB} &= \mathbf{Y}^{AB} (\mathbf{f}^{AB} - \mathbf{B}^{AB^T} \lambda) \\ \mathbf{u}^A &= -\mathbf{Y}^A (-\mathbf{B}^{A^T} \lambda) \end{aligned}$$

$$\begin{aligned} [\mathbf{B}^{AB} \mathbf{Y}^{AB} \mathbf{B}^{AB^T} - \mathbf{B}^A \mathbf{Y}^A \mathbf{B}^{A^T}] \lambda &= \mathbf{B}^{AB} \mathbf{Y}^{AB} \mathbf{f}^{AB} \\ \lambda &= [\mathbf{B}^{AB} \mathbf{Y}^{AB} \mathbf{B}^{AB^T} - \mathbf{B}^A \mathbf{Y}^A \mathbf{B}^{A^T}]^{-1} \mathbf{B}^{AB} \mathbf{Y}^{AB} \mathbf{f}^{AB} \end{aligned}$$

$$\mathbf{u}^{AB} = (\mathbf{Y}^{AB} - \mathbf{Y}^{AB} \mathbf{B}^{AB^T} [\mathbf{B}^{AB} \mathbf{Y}^{AB} \mathbf{B}^{AB^T} - \mathbf{B}^A \mathbf{Y}^A \mathbf{B}^{A^T}]^{-1} \mathbf{B}^{AB} \mathbf{Y}^{AB}) \mathbf{f}^{AB}$$


$$\mathbf{u}^A = \mathbf{Y}^A \mathbf{B}^{A^T} [\mathbf{B}^{AB} \mathbf{Y}^{AB} \mathbf{B}^{AB^T} - \mathbf{B}^A \mathbf{Y}^A \mathbf{B}^{A^T}]^{-1} \mathbf{B}^{AB} \mathbf{Y}^{AB} \mathbf{f}^{AB}$$

ppfff ... but in here is the FRF of B when isolated (see next page)



Frequency Based Decoupling: Basics

Working it out for

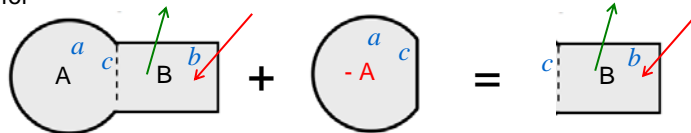

Assuming (without loss of generality) the numbering of dofs such that

$$\mathbf{Y}^{AB} = \begin{bmatrix} \mathbf{Y}_{aa}^{AB} & \mathbf{Y}_{ac}^{AB} & \mathbf{Y}_{ab}^{AB} \\ \mathbf{Y}_{ca}^{AB} & \mathbf{Y}_{cc}^{AB} & \mathbf{Y}_{cb}^{AB} \\ \mathbf{Y}_{ba}^{AB} & \mathbf{Y}_{bc}^{AB} & \mathbf{Y}_{bb}^{AB} \end{bmatrix} \quad \mathbf{u}^{AB} = \begin{bmatrix} \mathbf{u}_a^{AB} \\ \mathbf{u}_c^{AB} \\ \mathbf{u}_b^{AB} \end{bmatrix} \quad \mathbf{f}^{AB} = \begin{bmatrix} \mathbf{0} \\ \mathbf{0} \\ \mathbf{f}_b^{AB} \end{bmatrix}$$


$$\mathbf{Y}^A = \begin{bmatrix} \mathbf{Y}_{aa}^A & \mathbf{Y}_{ac}^{AB} \\ \mathbf{Y}_{ca}^A & \mathbf{Y}_{cc}^A \end{bmatrix} \quad \mathbf{u}^A = \begin{bmatrix} \mathbf{u}_a^A \\ \mathbf{u}_c^A \end{bmatrix}$$

$$\mathbf{B} = [\mathbf{B}^{AB} \quad \mathbf{B}^A] = [\mathbf{0} \quad \mathbf{I} \quad \mathbf{0} \quad \mathbf{0} \quad -\mathbf{I}]$$



Frequency Based Decoupling: Basics

Working it out for

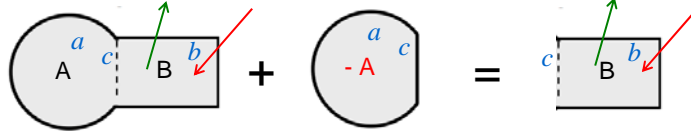

One finds

$$\begin{bmatrix} u_a \\ u_c \\ u_b \end{bmatrix}^{AB} = \left(\begin{bmatrix} Y_{ab}^{AB} \\ Y_{cb}^{AB} \\ Y_{bb}^{AB} \end{bmatrix} - \begin{bmatrix} Y_{ac}^{AB} \\ Y_{cc}^{AB} \\ Y_{bc}^{AB} \end{bmatrix} [Y_{cc}^{AB} - Y_{cc}^A]^{-1} Y_{cb}^{AB} \right) f_b^{AB}$$


$$\begin{bmatrix} u_a \\ u_c \end{bmatrix}^A = - \begin{bmatrix} Y_{ac}^A \\ Y_{cc}^A \end{bmatrix} [Y_{cc}^{AB} - Y_{cc}^A]^{-1} Y_{cb}^{AB} f_b^{AB}$$

$$u_b = \left(Y_{bb}^{AB} - Y_{bc}^{AB} [Y_{cc}^{AB} - Y_{cc}^A]^{-1} Y_{cb}^{AB} \right) f_b^{AB}$$



Frequency Based Decoupling: Basics

Working it out for

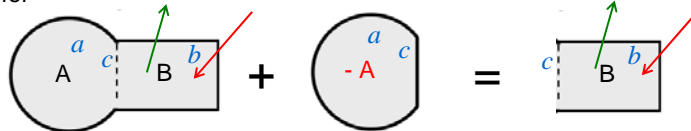

If errors in measurements of AB and/or A, might be useful to impose this compatibility explicitly

identical by construction

$$\begin{bmatrix} u_a \\ u_c \\ u_b \end{bmatrix}^{AB} = \left(\begin{bmatrix} Y_{ab}^{AB} \\ Y_{cb}^{AB} \\ Y_{bb}^{AB} \end{bmatrix} - \begin{bmatrix} Y_{ac}^{AB} \\ Y_{cc}^{AB} \\ Y_{bc}^{AB} \end{bmatrix} [Y_{cc}^{AB} - Y_{cc}^A]^{-1} Y_{cb}^{AB} \right) f_b^{AB}$$

identical because „A in AB“ is equal to „A subtracted“

$$\begin{bmatrix} u_a \\ u_c \end{bmatrix}^A = - \begin{bmatrix} Y_{ac}^A \\ Y_{cc}^A \end{bmatrix} [Y_{cc}^{AB} - Y_{cc}^A]^{-1} Y_{cb}^{AB} f_b^{AB}$$

$$u_b = \left(Y_{bb}^{AB} - Y_{bc}^{AB} [Y_{cc}^{AB} - Y_{cc}^A]^{-1} Y_{cb}^{AB} \right) f_b^{AB}$$




Outline

- **Recap of MOD02:**
Frequency Based Substructuring (FBS)3-field form
- **Frequency Based Substructuring: Basics**
- **Frequency Based Substructuring: A big Family**
 - Method 1 – Standard Decoupling
 - Method 2 – Extended Interface Decoupling
 - Method 4 – Non-Collocated Overdetermined
 - Method 5 – Weak, Interface Filtering
 - Method 6 – Weak, A Filtering
 - Summary of Variants
- **Numerical Example / Experimental Example**

References and bibliography

Frequency Based Decoupling: A Big Family

To understand how various decoupling method can be devised, let us reconsider

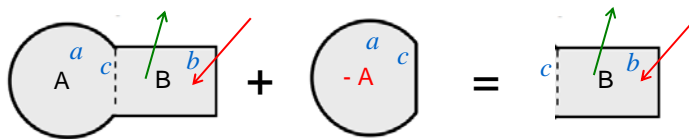

$$\begin{bmatrix} Z^{AB} & 0 & B^{AB^T} \\ 0 & -Z^A & B^{A^T} \\ B^{AB} & B^A & 0 \end{bmatrix} \begin{bmatrix} u^{AB} \\ u^A \\ \lambda \end{bmatrix} = \begin{bmatrix} f^{AB} \\ 0 \\ 0 \end{bmatrix}$$

- writing explicitly that AB is an assembly of A and B
- noting that "A in AB" can be different from A alone due to measurement/modeling errors

$$\tilde{Z}^A = Z^A + \Delta$$

$$\begin{bmatrix} Z^A & 0 & B^{A^T} & 0 & -E^{A^T} \\ 0 & Z^B & B^{B^T} & 0 & 0 \\ B^A & B^B & 0 & 0 & 0 \\ 0 & 0 & 0 & -\tilde{Z}^A & E^{A^T} \\ -C^A & 0 & 0 & C^A & 0 \end{bmatrix} \begin{bmatrix} u_A^{AB} \\ u_B^{AB} \\ \lambda^{AB} \\ u^A \\ \lambda \end{bmatrix} = \begin{bmatrix} 0 \\ f_B^{AB} \\ 0 \\ 0 \\ 0 \end{bmatrix}$$


$$\begin{bmatrix} Z^{AB} & 0 & E^{AB^T} \\ 0 & -\tilde{Z}^A & E^{A^T} \\ C^{AB} & C^A & 0 \end{bmatrix} \begin{bmatrix} u^{AB} \\ u^A \\ \lambda \end{bmatrix} = \begin{bmatrix} f^{AB} \\ 0 \\ 0 \end{bmatrix}$$

If $E=C$ then "collocated"
If not, "non-collocated"

to be determines so that the result is the free FRF of B

Frequency Based Decoupling: A Big Family

Method 1: **standard decoupling** (collocated on interface)

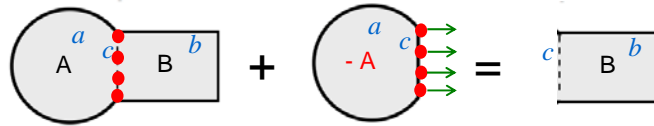

note: forces drawn only in
standalone A for simplicity

$$\begin{bmatrix} \mathbf{Z}^{AB} & \mathbf{0} & \mathbf{E}^{AB^T} \\ \mathbf{0} & -\tilde{\mathbf{Z}}^A & \mathbf{E}^{A^T} \\ \mathbf{C}^{AB} & \mathbf{C}^A & \mathbf{0} \end{bmatrix} \begin{bmatrix} \mathbf{u}^{AB} \\ \mathbf{u}^A \\ \lambda \end{bmatrix} = \begin{bmatrix} \mathbf{f}^{AB} \\ \mathbf{0} \\ \mathbf{0} \end{bmatrix}$$

$$\mathbf{C}^{AB} = \mathbf{E}^{AB} = [\mathbf{0}_{ca} \quad \mathbf{I}_{cc} \quad \mathbf{0}_{cb}]$$

corresponds to the method derived in the previous slides:

$$\mathbf{C}^A = \mathbf{E}^A = [\mathbf{0}_{ca} \quad -\mathbf{I}_{cc}]$$


☹️ simple but very sensitive to errors !



Short Course on Experimental Dynamic Substructuring, © 2014

Frequency Based Decoupling: A Big Family

Method 2: **“extended interface” decoupling** (collocated on interface and in A)

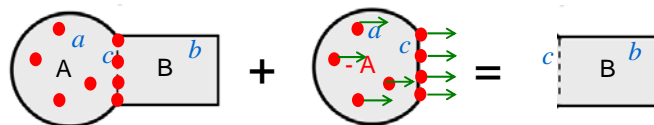

$$\begin{bmatrix} \mathbf{Z}^{AB} & \mathbf{0} & \mathbf{E}^{AB^T} \\ \mathbf{0} & -\tilde{\mathbf{Z}}^A & \mathbf{E}^{A^T} \\ \mathbf{C}^{AB} & \mathbf{C}^A & \mathbf{0} \end{bmatrix} \begin{bmatrix} \mathbf{u}^{AB} \\ \mathbf{u}^A \\ \lambda \end{bmatrix} = \begin{bmatrix} \mathbf{f}^{AB} \\ \mathbf{0} \\ \mathbf{0} \end{bmatrix}$$

$$\mathbf{C}^{AB} = \mathbf{E}^{AB} = \begin{bmatrix} \mathbf{I}_{aa} & \mathbf{0} & \mathbf{0} \\ \mathbf{0} & \mathbf{I}_{cc} & \mathbf{0} \end{bmatrix}$$

Request compatibility on interface and in some dofs of A

😊 . uses more info of the problem

$$\mathbf{C}^A = \mathbf{E}^A = \begin{bmatrix} -\mathbf{I}_{aa} & \mathbf{0} \\ \mathbf{0} & -\mathbf{I}_{cc} \end{bmatrix}$$

☹️ . still strong compatibility so sensitive to errors
interface problem badly condition (could use SVD)




Short Course on Experimental Dynamic Substructuring, © 2014

[3,4]

Frequency Based Decoupling: A Big Family

Method 3: **Non-Collocated (NC) overdetermined**

forces on interface / compatibility on interface & in A

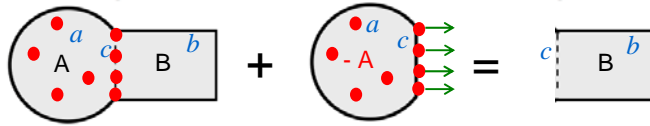

$$\begin{bmatrix} Z^{AB} & \mathbf{0} & E^{AB^T} \\ \mathbf{0} & -\tilde{Z}^A & E^{A^T} \\ C^{AB} & C^A & \mathbf{0} \end{bmatrix} \begin{bmatrix} u^{AB} \\ u^A \\ \lambda \end{bmatrix} = \begin{bmatrix} f^{AB} \\ \mathbf{0} \\ \mathbf{0} \end{bmatrix} \quad \begin{aligned} E^{AB} &= [\mathbf{0}_{ca} \quad I_{cc} \quad \mathbf{0}_{cb}] \\ E^A &= [\mathbf{0}_{ca} \quad -I_{cc}] \end{aligned}$$

$$C^{AB} = \begin{bmatrix} I_{aa} & \mathbf{0} & \mathbf{0} \\ \mathbf{0} & I_{cc} & \mathbf{0} \end{bmatrix}$$

$$C^A = \begin{bmatrix} -I_{aa} & \mathbf{0} \\ \mathbf{0} & -I_{cc} \end{bmatrix}$$

More compatibility asked for than forces :



- . uses more info of the problem
- . only approximate (weak compatibility)
- . interface problem overdetermined (least square)


[5,6]

Short Course on Experimental Dynamic Substructuring, © 2014

Frequency Based Decoupling: A Big Family

Method 4: **Non-Collocated (NC) internal**

forces in A / compatibility on interface

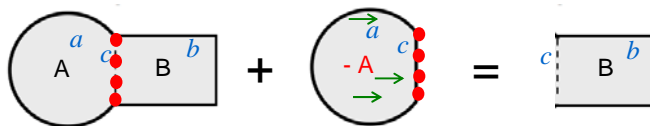

$$\begin{bmatrix} Z^{AB} & \mathbf{0} & E^{AB^T} \\ \mathbf{0} & -\tilde{Z}^A & E^{A^T} \\ C^{AB} & C^A & \mathbf{0} \end{bmatrix} \begin{bmatrix} u^{AB} \\ u^A \\ \lambda \end{bmatrix} = \begin{bmatrix} f^{AB} \\ \mathbf{0} \\ \mathbf{0} \end{bmatrix} \quad \begin{aligned} E^{AB} &= [I_{aa} \quad \mathbf{0}_{ac} \quad \mathbf{0}_{ab}] \\ E^A &= [-I_{aa} \quad \mathbf{0}_{ac}] \end{aligned}$$

$$C^{AB} = [\mathbf{0} \quad I_{cc} \quad \mathbf{0}]$$

$$C^A = [\mathbf{0} \quad -I_{cc}]$$

Works if the interface dofs are controllable from the dofs inside A




- . no need to have driving points at interface (can be difficult to measure)
- . approximate (weak) compatibility
- . interface problem overdetermined if more c-dofs than a-dofs

Short Course on Experimental Dynamic Substructuring, © 2014

Frequency Based Decoupling: A Big Family

Many other variants can be imagined by choosing other locations for the compatibility conditions and for the forces.

One could even imagine taking more forces than compatibility conditions. In that case the interface problem would be underdetermined and a least square procedure would choose the force distribution with minimum norm.

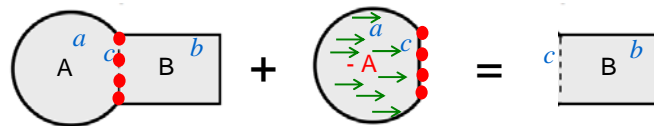

This would correspond to a weakening on the force side.



The next variants introduce weakening explicitly in the standard formulas, similar to what was done in the coupling of substructures through FBS (MOD02)



Short Course on Experimental Dynamic Substructuring, © 2014

Outline

- **Recap of MOD02:**
Frequency Based Substructuring (FBS)3-field form
- **Frequency Based Substructuring: Basics**
- **Frequency Based Substructuring: A big Family**
 - Method 1 – Standard Decoupling
 - Method 2 – Extended Interface Decoupling
 - Method 4 – Non-Collocated Overdetermined
 - Method 5 – Weak, Interface Filtering
 - Method 6 – Weak, A Filtering
 - Summary of Variants
- **Numerical Example / Experimental Example**



References and bibliography

Short Course on Experimental Dynamic Substructuring, © 2014

Frequency Based Decoupling: A Big Family

When measurements noisy, interface very stiff, or when coupling modal models (risk of locking), it is necessary to relax the compatibility requirements between AB and A.

Here we will only consider weakening through filtering (see also MOD02).

Starting again from the standard method (collocated on interface)

$$\begin{bmatrix} \mathbf{Z}^{AB} & 0 & \begin{bmatrix} 0 \\ \mathbf{I} \\ 0 \end{bmatrix} \\ 0 & -\mathbf{Z}^A & \begin{bmatrix} -\mathbf{I} \\ 0 \end{bmatrix} \\ \begin{bmatrix} 0 & \mathbf{I} & 0 \end{bmatrix} & \begin{bmatrix} -\mathbf{I} & 0 \end{bmatrix} & 0 \end{bmatrix} \begin{bmatrix} \mathbf{u}_a^{AB} \\ \mathbf{u}_c^{AB} \\ \mathbf{u}_b^{AB} \\ \mathbf{u}_a^A \\ \mathbf{u}_c^A \\ \lambda \end{bmatrix} = \begin{bmatrix} \mathbf{f}_a^{AB} \\ 0 \\ 0 \\ 0 \\ 0 \\ 0 \end{bmatrix}$$

Short Course on Experimental Dynamic Substructuring, © 2014

Frequency Based Decoupling: A Big Family

$$\begin{bmatrix} \mathbf{Z}^{AB} & 0 & \begin{bmatrix} 0 \\ \mathbf{I} \\ 0 \end{bmatrix} \\ 0 & -\mathbf{Z}^A & \begin{bmatrix} -\mathbf{I} \\ 0 \end{bmatrix} \\ \begin{bmatrix} 0 & \mathbf{I} & 0 \end{bmatrix} & \begin{bmatrix} -\mathbf{I} & 0 \end{bmatrix} & 0 \end{bmatrix} \begin{bmatrix} \mathbf{u}_a^{AB} \\ \mathbf{u}_c^{AB} \\ \mathbf{u}_b^{AB} \\ \mathbf{u}_a^A \\ \mathbf{u}_c^A \\ \lambda \end{bmatrix} = \begin{bmatrix} \mathbf{f}_a^{AB} \\ 0 \\ 0 \\ 0 \\ 0 \\ 0 \end{bmatrix}$$

We want now to impose compatibility on the interface only for a reduced modal approximation of the displacements on the interface. Assuming we use as representation basis the modes of A (often modeled by FE) on the interface: Φ_c^A . Then


$$\begin{bmatrix} \mathbf{Z}^{AB} & 0 & \begin{bmatrix} 0 \\ \mathbf{I} \\ 0 \end{bmatrix} \\ 0 & -\mathbf{Z}^A & \begin{bmatrix} -\mathbf{I} \\ 0 \end{bmatrix} \\ \begin{bmatrix} 0 & \mathbf{I} & 0 \end{bmatrix} & \begin{bmatrix} -\mathbf{I} & 0 \end{bmatrix} & 0 \end{bmatrix} \begin{bmatrix} \mathbf{u}_a^{AB} \\ \mathbf{u}_c^{AB} \\ \mathbf{u}_b^{AB} \\ \mathbf{u}_a^A \\ \mathbf{u}_c^A \\ \lambda \end{bmatrix} = \begin{bmatrix} \mathbf{f}_a^{AB} \\ 0 \\ 0 \\ 0 \\ 0 \\ 0 \end{bmatrix}$$

$$\begin{aligned} \mathbf{u}_c^A &\simeq \Phi_c^A \mathbf{q}^A \rightarrow \mathbf{q}^A = \Phi_c^{A+} \mathbf{u}_c^A, \\ \mathbf{u}_c^{AB} &\simeq \Phi_c^A \mathbf{q}^{AB} \rightarrow \mathbf{q}^{AB} = \Phi_c^{A+} \mathbf{u}_c^{AB}, \end{aligned} \quad \begin{array}{l} \text{"filtered"} \\ \text{compatibility} \end{array} \quad \mathbf{q}^{AB} - \mathbf{q}^A = \Phi_c^{A+} \mathbf{u}_c^{AB} - \Phi_c^{A+} \mathbf{u}_c^A = \mathbf{0}$$

Short Course on Experimental Dynamic Substructuring, © 2014

Frequency Based Decoupling: A Big Family

→ Method 5: **Weak - interface filtering**

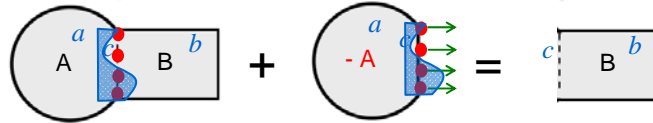


$$\begin{bmatrix} Z^{AB} & 0 \\ 0 & -Z^A \\ \begin{bmatrix} 0 & \Phi_c^{A+} & 0 \end{bmatrix} & \begin{bmatrix} -\Phi_c^{A+} & 0 \end{bmatrix} \end{bmatrix} \begin{bmatrix} \begin{bmatrix} 0 \\ \Phi_c^{A+T} \\ 0 \end{bmatrix} \\ \begin{bmatrix} -\Phi_c^{A+T} \\ 0 \end{bmatrix} \\ 0 \end{bmatrix} \begin{bmatrix} u_a^{AB} \\ u_c^{AB} \\ u_b^A \\ u_a^A \\ u_c^A \\ \lambda_{n_\Phi} \end{bmatrix} = \begin{bmatrix} f_a^{AB} \\ 0 \\ 0 \\ 0 \\ 0 \\ 0 \end{bmatrix}$$

Request compatibility on interface only for modal contributions in space of Φ_c^A


- 😊 . weak interface compatibility (only n_Φ conditions)
- . the filtering basis can be any good representation of interface behavior (here the modes of A, but could be any approximate shape)
- 😞 . needs enough measured points c on the interface to have a good fit.

Short Course on Experimental Dynamic Substructuring, © 2014

Frequency Based Decoupling: A Big Family

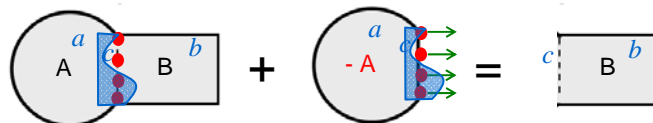

Idea: use also the *internal points in A* to fit the modal representation

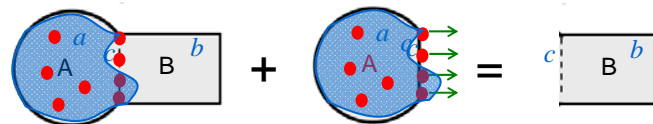

$$\begin{bmatrix} u_a \\ u_c \end{bmatrix}^{AB} \simeq \begin{bmatrix} \Phi_a^A \\ \Phi_c^A \end{bmatrix} q^{AB} \rightarrow q^{AB} = \begin{bmatrix} \Phi_a^A \\ \Phi_c^A \end{bmatrix}^+ \begin{bmatrix} u_a \\ u_c \end{bmatrix}$$

"filtered" compatibility

$$\begin{bmatrix} u_a \\ u_c \end{bmatrix}^A \simeq \begin{bmatrix} \Phi_a^A \\ \Phi_c^A \end{bmatrix} q^A \rightarrow q^A = \begin{bmatrix} \Phi_a^A \\ \Phi_c^A \end{bmatrix}^+ \begin{bmatrix} u_a \\ u_c \end{bmatrix}$$

$$\Rightarrow q^{AB} - q^A = \begin{bmatrix} \Phi_a^A \\ \Phi_c^A \end{bmatrix}^+ \begin{bmatrix} u_a \\ u_c \end{bmatrix} - \begin{bmatrix} \Phi_a^A \\ \Phi_c^A \end{bmatrix}^+ \begin{bmatrix} u_a \\ u_c \end{bmatrix} = 0$$

Short Course on Experimental Dynamic Substructuring, © 2014

Frequency Based Decoupling: A Big Family

→ Method 6: **Weak - A filtering**

$$\begin{bmatrix}
 Z^{AB} & 0 & \begin{bmatrix} 0 \\ \Phi_{ca}^{A+T} \\ 0 \end{bmatrix} \\
 0 & -Z^A & \begin{bmatrix} -\Phi_{cb}^{A+T} \\ 0 \\ 0 \end{bmatrix} \\
 \begin{bmatrix} 0 & \Phi_{ca}^{A+} & 0 \end{bmatrix} & \begin{bmatrix} -\Phi_{cb}^{A+} & 0 \end{bmatrix} & 0
 \end{bmatrix}
 \begin{bmatrix}
 u_{ca}^{AB} \\
 u_{cb}^{AB} \\
 u_{ca}^A \\
 u_{cb}^A \\
 \lambda_{n\phi}
 \end{bmatrix}
 =
 \begin{bmatrix}
 f_a^{AB} \\
 0 \\
 0 \\
 0 \\
 0
 \end{bmatrix}$$

Request compatibility on interface & internal dofs of A only for modal contributions Φ_c^A

- 😊 weak interface compatibility (only n_ϕ conditions)
- the filtering basis can be any good representation of interface behavior
- use of any (sufficient) info available on A (works even if no interface measurement)

Can be seen as a weakening of the extended interface method (method 2)

This idea was exploited in the Modal Constraints for Fixture & Subsystem (MCFS) → MOD08


[7]

Short Course on Experimental Dynamic Substructuring, © 2014


Summary of variants discussed

Collocated (strong comp.)

Meth.1:
Standard




Meth.2:
Extended Interface




Non-Collocated (usually approx/weak comp.)

Meth.3:
NC overdetermined



Meth.4:
NC internal




As said, further variants can be built following similar ideas.

28


Summary of variants discussed (continued)

Weak Compatibility by filtering

Meth.5:
Weak - Interface Filtering



Meth.6:
Weak - A Filtering



As said, further variants can be built following similar ideas.

29


Outline

- **Recap of MOD02:**
Frequency Based Substructuring (FBS)3-field form
- **Frequency Based Substructuring: Basics**
- **Frequency Based Substructuring: A big Family**
 - Method 1 – Standard Decoupling
 - Method 2 – Extended Interface Decoupling
 - Method 4 – Non-Collocated Overdetermined
 - Method 5 – Weak, Interface Filtering
 - Method 6 – Weak, A Filtering
 - Summary of Variants
- **Numerical Example / Experimental Example**

References and bibliography

Numerical example:

data given in [1]

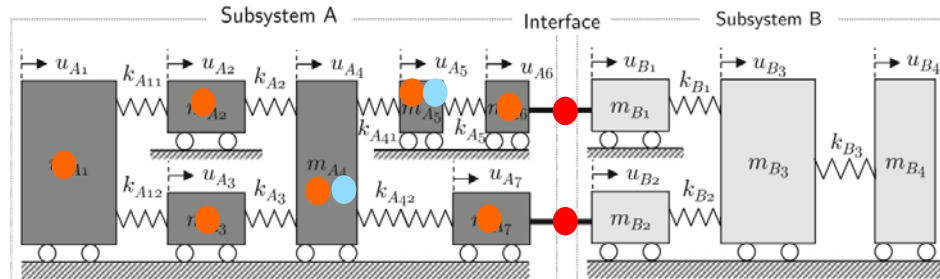

Methods tested:

	dofs in comp.	dofs for forces	No noise	with noise
Meth. 1 Standard	●	●		
Meth. 2 Extended interf.	● ●	● ●		
Meth. 3 NC overdeter.	● ●	●		
Meth. 4 NC internal	●	●		


Check consistency

Sensitivity to error


Short Course on Experimental Dynamic Substructuring, © 2014

31

Numerical example:

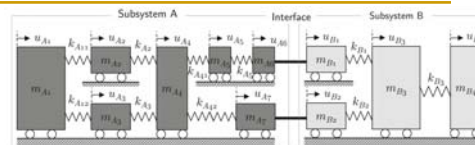

No noise

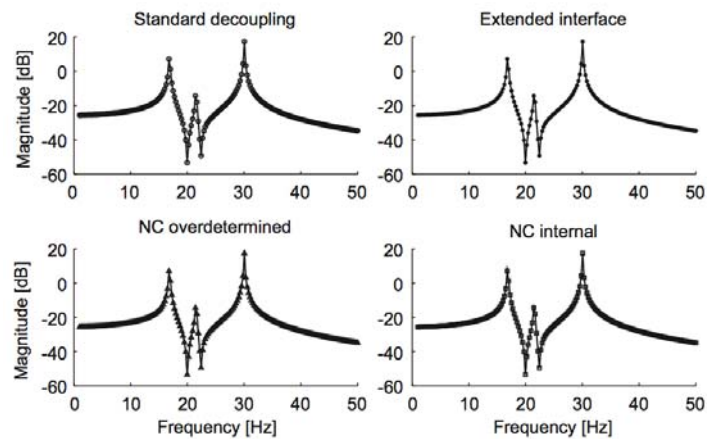


All 4 methods return the exact solution → consistent

Short Course on Experimental Dynamic Substructuring, © 2014

32

Numerical example:

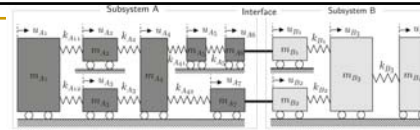


Uncertainty propagation analysis

through Monte-Carlo simulations or formal uncertainty analysis [8]

normally distributed random error –


amplitude: 95% confidence interval of $\pm 2\%$

phase : 95% confidence interval of $\pm 2^\circ$

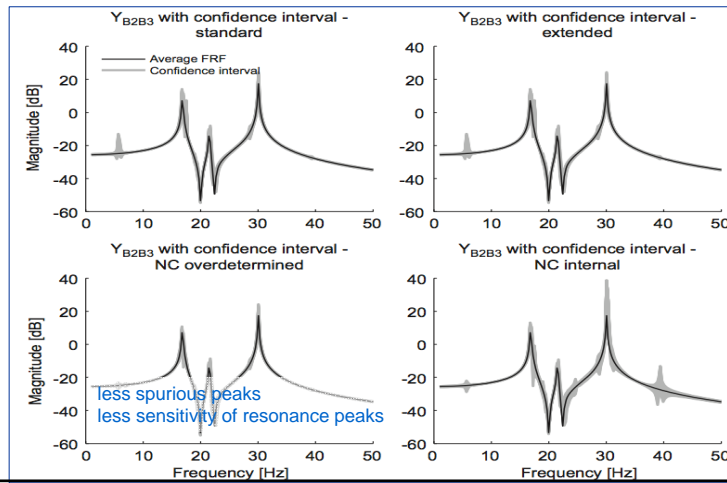


33


Experimental example



AB




A



rigid mass
(simple FRF)

B ?

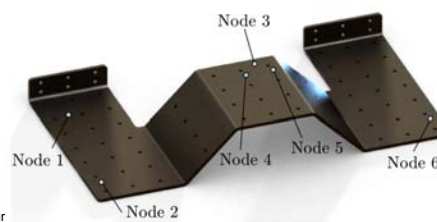


Short Cour

34

Experimental example

Overview of decoupling variants applied to experimental case study.

Method	Compatibility	Equilibrium
Standard	Nodes 3–5 (9 DoF)	Nodes 3–5 (9 DoF)
Extended interface	Nodes 1–6 (18 DoF)	Nodes 1–6 (18 DoF)
NC overdetermined	Nodes 1–6 (18 DoF)	Nodes 3–5 (9 DoF)
NC internal	Nodes 3–5 (9 DoF)	Nodes 1, 2 and 6 (9 DoF)
MCFS modal	Nodes 1–6 (18 DoF) projected on first 15 modes of A	See compatibility
MCFS modal	Nodes 1–6 (18 DoF) projected on first 10 modes of A	See compatibility

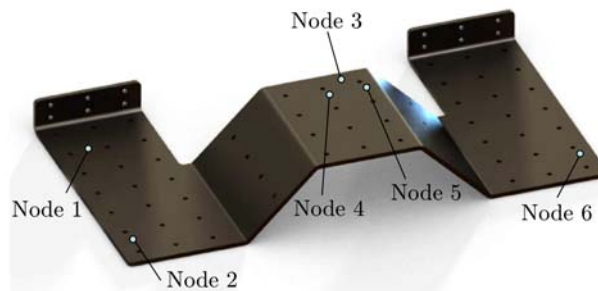


Short Course on Experimental Dynamic Substructuring, © 2014

35

Experimental example


Extract FRF (should be a mass⁻¹ line)

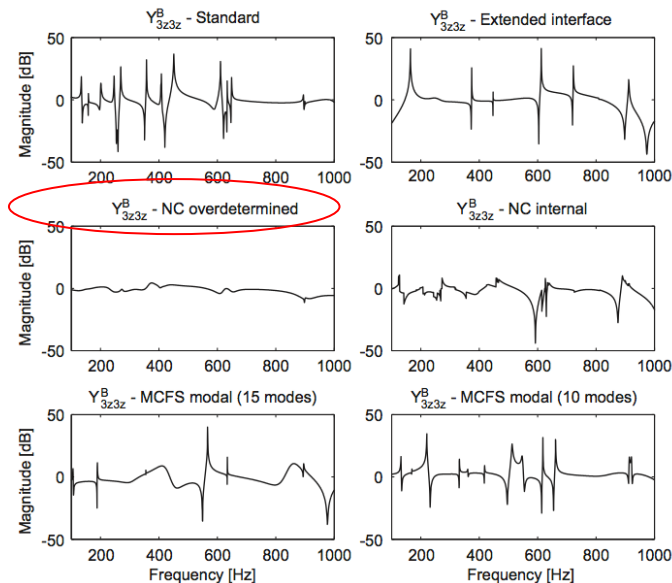

36

Experimental example

Extract FRF (should be a mass⁻¹ line)

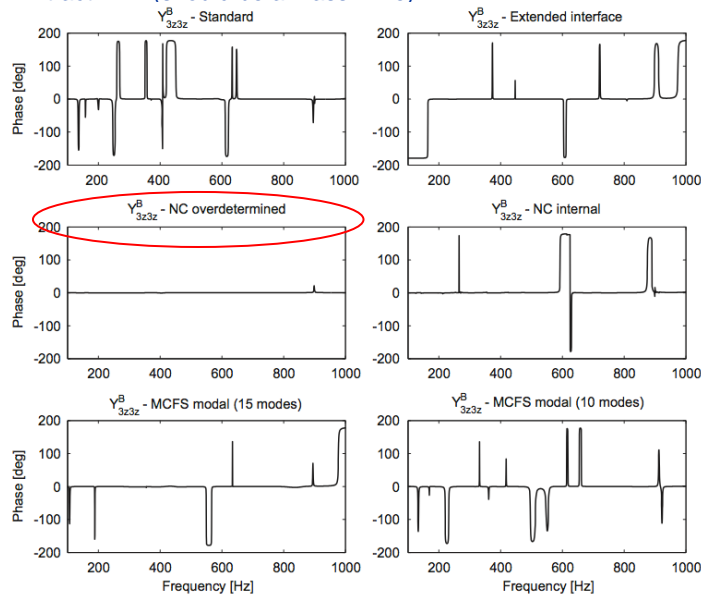

37

References and bibliography (non exhaustive!)

- 1 S. Voormeeren and D. Rixen. A family of substructure decoupling techniques based on a dual assembly approach. *Mechanical Systems and Signal Processing*, 27:379–396, 2012.
- 2 J. Zhen, T. C. Lim, and G. Lu. Determination of system vibratory response characteristics applying a spectral-based inverse substructuring approach. part ii: motor vehicle structures. *Int. J. Vehicle Noise and Vibration*, 1(1/2):31–67, 2004.
- 3 W. D'Ambrogio, A. Fregolent, Decoupling procedures in the general framework of frequency based substructuring, in: Proceedings of the 27th International Modal Analysis Conference, Society for Experimental Mechanics, Bethel, CT, 2009.
- 4 W. D'Ambrogio, A. Fregolent, The role of interface DoFs in decoupling of substructures based on the dual domain decomposition, *Mechanical Systems and Signal Processing* 24 (2010) 2035–2048.
- 5 P. Sjövall, T. Abrahamsson, Substructure system identification from coupled system test data, *Mechanical Systems and Signal Processing* 22 (2007) 15–33.
- 6 W. D'Ambrogio, A. Fregolent, Promises and pitfalls of decoupling techniques, in: Proceedings of the 26th International Modal Analysis Conference, Society for Experimental Mechanics, Bethel, CT, 2008.
- 7 M. S. Allen, R. L. Mayes, and E. J. Bergman. Experimental modal substructuring to couple and uncouple substructures with flexible fixtures and multipoint connections. *Jnl. Sound and Vibration*, 329(23):4891–4906, 2010.
- 8 S. Voormeeren, D. de Klerk, and D. Rixen. Uncertainty quantification in experimental frequency based substructuring. *Mechanical Systems and Signal Processing*, 24(1):106 – 118, 2010.

References and bibliography *(non exhaustive!)*

- 9 P. Ind, D. Ewins, Impedance based decoupling and its application to indirect modal testing and component measurement: a numerical investigation, in: *Proceedings of the 21st International Modal Analysis Conference*, Kissimmee, FL, Society for Experimental Mechanics, Bethel, CT, 2003.
- 10 M. van der Seijs, D. de Klerk, D. Rixen, and S. Rahimi. Validation of current state frequency based substructuring technology for the characterisation of steering gear – vehicle interaction. In *IMAC-XXXI: International Modal Analysis Conference, Garden Grove, California USA*, Bethel, CT, February Feb. 11-14, 2013. Society for Experimental Mechanics.
- 11 S. Rahimi, D. de Klerk, and D. Rixen. The ampair 600 wind turbine benchmark: Results from the frequency based substructuring applied to the rotor assembly. In *IMAC-XXXI: International Modal Analysis Conference, Garden Grove, California USA*, Bethel, CT, February Feb. 11-14, 2013. Society for Experimental Mechanics.

